

DAS-8062 | DAS-8063 | DAS-8064
Wall Mount Speaker with Power Tap



Description

This wall-mounted speaker features a sleek minimalist design in black or white, offering professional-grade sound quality with durable, high-quality materials for a clear and robust audio experience.

Features


- Fashion minimalist design aesthetic atmosphere ,white black for choice.
- The integration of professional wall design, fine appearance, sophisticated high-grade filing.
- Focus on sound quality, inverse-phase type design, and equipped with high pitch and low pitch double unit, clear sound level, mellow, transparent, clear and bright, strong bass.
- Rear power adjustable knob, free choice of input mode.
- Mesh: made of 1060 pure aluminium, subject to hardening and anti-oxidation treatment, not easy to cause deformation, and never get rusty.
- Box body: made of UL94V-0 grade fireproof thickened ABS material, durable in use,
- Safe and reliable.
- Driver unit: treble diaphragm is made of natural silk film; and bass diaphragm is made of polypropylene material, 3-3.5 inches magnetic circuit design.
- Mounting bracket: precision rust-proof treatment.

Specifications

Model		DAS-8062	DAS-8063	DAS-8064
Acoustic System	Speaker Unit	4"×1, 1"×1	5"×1, 1"×1	6.5"×1, 1"×1
	Sensitivity (1m, 1W)	90±2dB	90±2dB	91±2dB
	MAX. SPL. (1m)	103±2dB	105±2dB	107±2dB
	Frequency Response	95Hz-20kHz	80Hz-20kHz	65Hz-20kHz
Power Adjustment	Rated Power	20W	30W	40W
	70V	20W-15W-8W-4W-2W	30W-15W-8W-5W-2.5W	40W-20W-10W-5W-2.5W
	100V	20W-15W-8W-4W	30W-15W-8W-5W	40W-20W-10W-5W
	8Ω	20W	30W	40W
Other Specifications	Inp.	Constant Voltage	70V/100V	70V/100V
		Constant Resistance	8Ω	8Ω
	Dimensions (H×W×D)		255×176×170mm	310×215×203mm
	Net Weight		2.6kg	4.6kg


Front / Rear Panel

Product Information

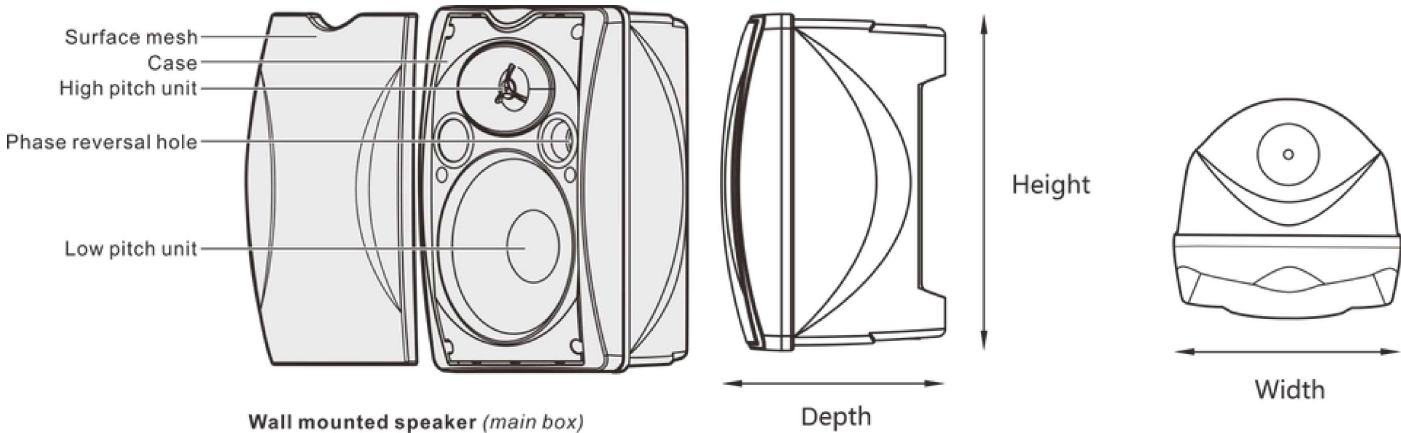


Model	Height	Width	Depth
DAS-8062	255	176	170
DAS-8063	280	194	185
DAS-8064	310	215	203


Unit: mm

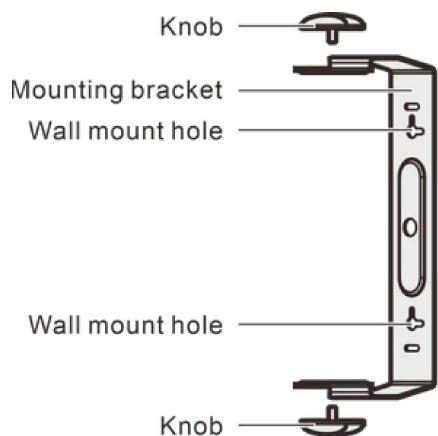


U-shape bracket

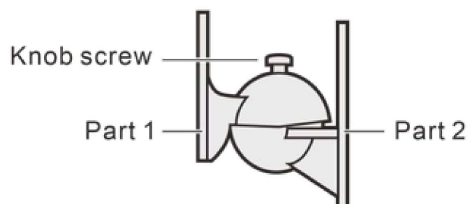


Multi-angle adjustable bracket

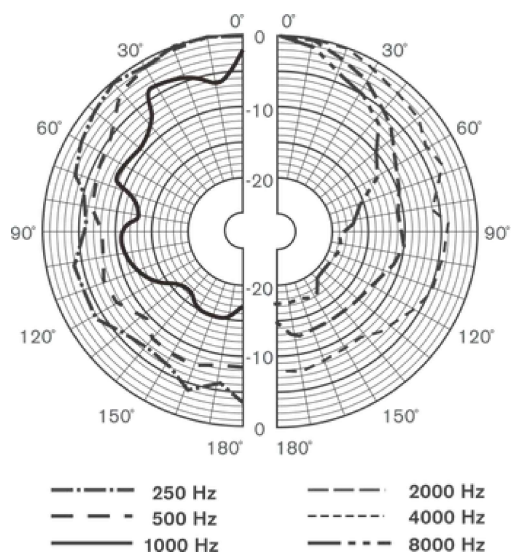


**DAS 8062 Vertical
Directivity Pattern**

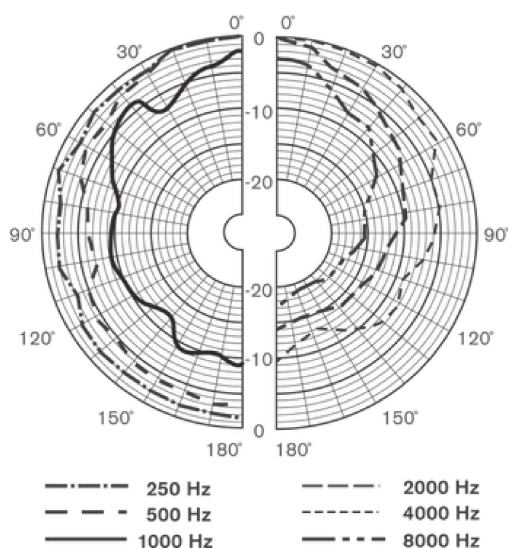


**DAS 8062 Horizontal
Directivity Pattern**

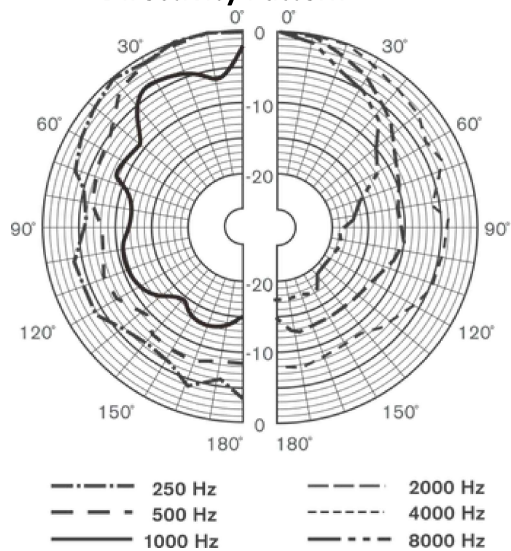


**DAS 8063 Vertical
Directivity Pattern**

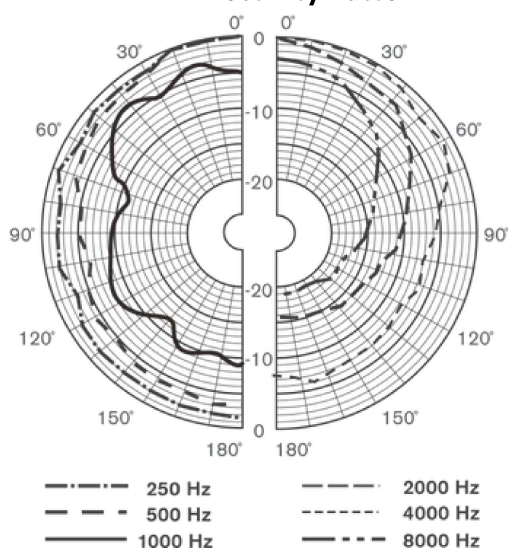

**DAS 8063 Horizontal
Directivity Pattern**

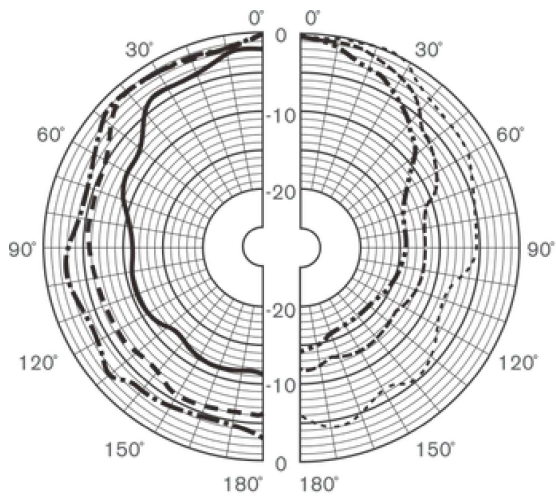


**DAS 8064 Vertical
Directivity Pattern**

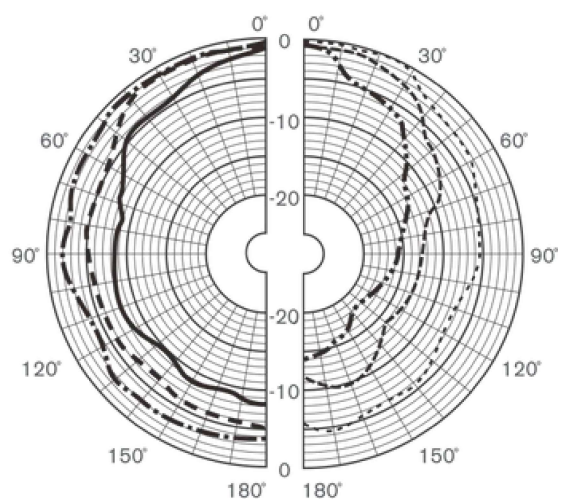


**DAS 8064 Horizontal
Directivity Pattern**


**DAS 8062 Frequency
Response (dB SPL, 1W, 1m)**

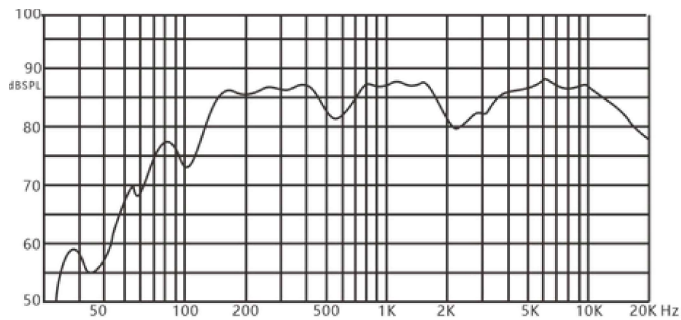


**DAS 8062 Distortion (THD< 5%
1W, 1m, 100Hz-10kHz)**

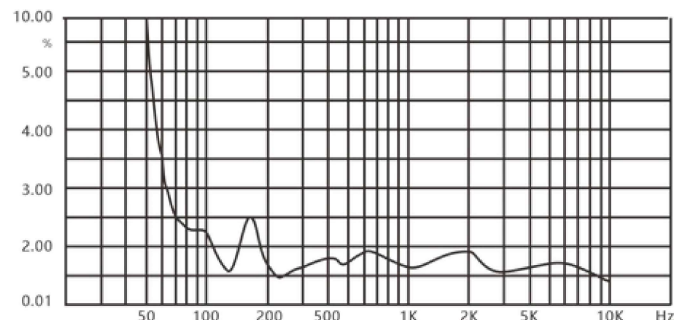


**DAS 8063 Frequency
Response (dB SPL, 1W, 1m)**

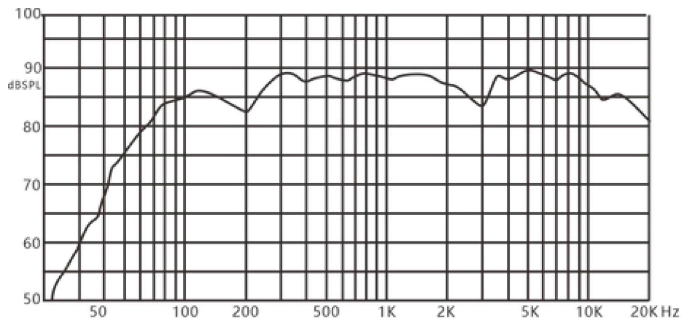

**DAS 8063 Distortion (THD< 5%
1W, 1m, 100Hz-10kHz)**

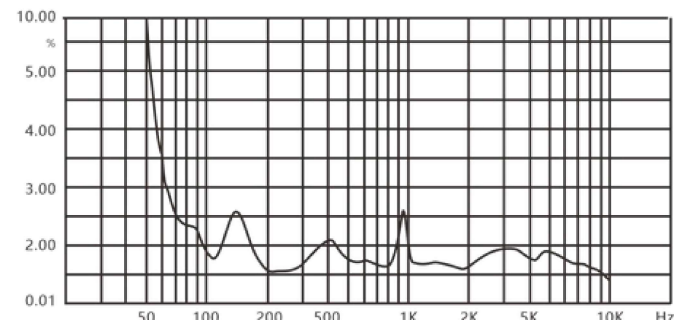

**DAS 8064 Frequency
Response (dB SPL, 1W, 1m)**

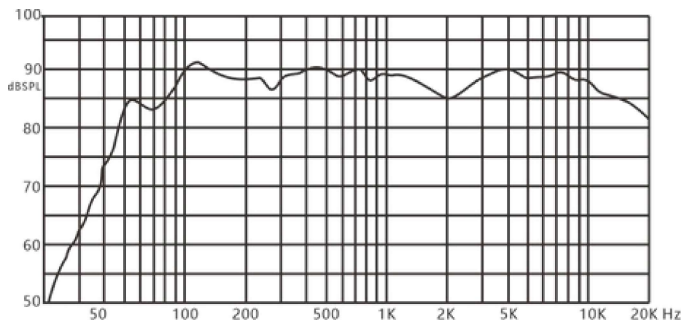

**DAS 8064 Distortion (THD< 5%
1W, 1m, 100Hz-10kHz)**

